



# LYSE T

light that sparks. conversations

The Lyset brand steps up to fill the needs of designers and architects that want to provide the best for their clients. With each decision we make as we develop our portfolio, we work to achieve the highest standards of exquisite simplicity and lighting systems. Under the Lyset brand, we choose the best products available, and we are pleased to collaborate with our business clients.

Our aim to choose the greatest products the market has to offer at the most reasonable prices is truly our pursuit of perfection. Lyset will transform your perspective on the reasonably priced luxury to provide a fun yet straightforward approach to lighting. Consider the grace and efficiency with which a feline navigates its environment; this is how we see our choice of products - as the exquisite minimalism needed for the modern home.

Whether you visit us in our showroom or have already made the decision to integrate our lighting systems with your architectural projects and home designs, we offer a premium experience. When you choose the Lyset brand, we commit that we will develop the solutions we have been searching for to take your home design to the next level.

Are you seeking a customized approach? We are here for you and will help you with any queries you may have. Until you offer the best architectural and design project to your own clients, we will support you along every step of your creative journey.





The Lyset brand offers intelligent lighting solutions for every project, complementing today's smart homes. Most Lyset products are compatible with platforms for managing smart homes on most smartphone apps. When one chooses the Lyset brand, they never have to sacrifice beauty for functionality because all of their ranges are flexible, compatible with smart apps, and customizable to meet any needs that the customer may have.

magnetic track	10
track system	28
9010 system	40
downlights	68
led profiles and lighting sources	90
flexible neon system	96

# magnetic track



















					
12 Recessed Magnetic profile LY-MTR2BR	15 Surface magnetic profile LY-MTR2W	15 Surface magnetic profile LY-MTR2B	16 IDA LY-MTR-12-3W	16 INES LY-MTR-12-P3W	20 IVY LY-MTR-10-P1
					
20 THOR 01 LY-MTR-15-18	20 THOR 02 LY-MTR-12-2B	22 LUV 01 LY-MTR-12-3B	22 LUV 02 LY-MTR-12-4B	23 ELM LY-MTR-20-P2	24 MOON LY-MTR-8-B1
					
27 Input module LY-MTR-IMCB LY-MTR-IMCW	27 Profile electric connector LY-MTR-IMCB LY-MTR-D/LPCW	27 "L" connector for recessed LY-MTR-LCRB	27 Vertical-horizontal connector LY-MTR-VOC	27 "L" connector for surface LY-MTR-LCSB LY-MTR-LCSW	27 In track driver LY-INTRACK100 LY-INTRACK250

# track system


					
30 Track rail LY-TR2W	30 Track rail LY-TR2B	30 KER LY13-TRGU10W	30 KER LY13-TRGU10B	33 ARM LY11-TRGU10W	33 ARM LY11-TRGU10B
					
34 LOKUS LY27-TRGU10W	34 LOKUS LY27-TRGU10GBW	34 LOKUS LY27-TRGU10B	34 LOKUS LY27-TRGU10GB	36 SIDE LY19-TR15B	37 SPEC LY22-TR7B

					
39 Live end connector LY-TR-LECW	39 Live end connector LY-TR-LECB	39 "L" connector LY-TR-LCW	39 "L" connector LY-TR-LCB	39 "T" connector LY-TR-TCW	39 "T" connector LY-TR-TCB
					
39 Linear connector LY-TR-CLINW	39 Linear connector LY-TR-CLINB				

# 9010 system

					
42 WAY 01 LY9010-1G	42 WAY 01 LY9010-1B	42 WAY 02 LY9010-2G	42 WAY 02 LY9010-2B	47 WAY 03 LY9010-3G	47 WAY 03 LY9010-3B
					
48 WAY 04 LY9010-4G	48 WAY 04 LY9010-4B	51 SQUARE LY9010-5B	51 SQUARE LY9010-5G	53 RECTANGLE LY9010-6B	56 MALV LY9010-9B
					
56 MALV LY9010-9G	56 DREAM LY9010-14B	56 DREAM LY9010-14G	59 LINE LY9010-11B	59 LUCE LY9010-13G	59 LUCE LY9010-13B



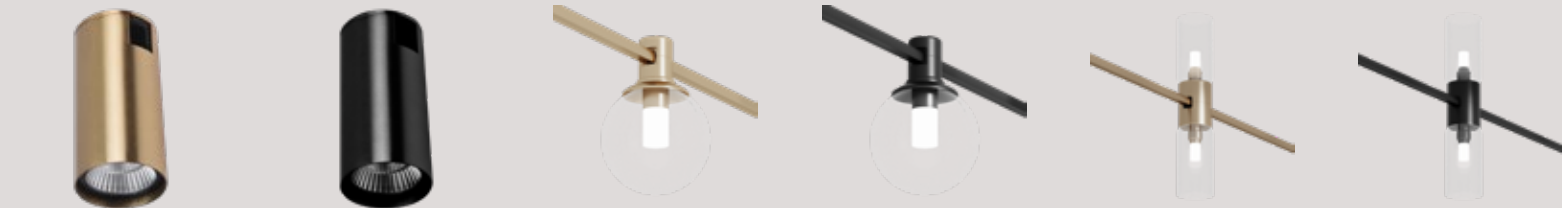

60 ERA LY9010-12G    60 ERA LY9010-12B    62 GLOBE LY9010-15G    62 GLOBE LY9010-15B    63 ALMA LY9010-16G    63 ALMA LY9010-16B



65 TWIST LY9010-17G    65 TWIST LY9010-17B    67 SPARK LY9010-7G    67 SPARK LY9010-7B    67 FALL LY9010-8G    67 FALL LY9010-8B

downlights



71 ARM LY11-GU10B    71 ARM LY11-GU10W    72 TUBE LY30-GU10W    74 FOLD 8,5 LY10-12W    74 FOLD 8,5 LY10-12B    74 FOLD 12 LY10-18B



74 FOLD 12 LY10-18W    76 RIN LY12-GU10B    76 RIN LY12-GU10W    76 PLUMP LY28-GU10B    76 PLUMP LY28-GU10W    78 LOKUS LY26-GU10G




78 LOKUS LY26-GU10W    78 LOKUS LY26-GU10B    79 AMBRA LY33-12RECW    81 EYE LY26-GU10RECW    81 EYE LY26-GU10RECB    81 DEEP LY16-10RECW



82 MINI LY17-5RECW    83 ATOM 8,5 LY18-8RECW    83 ATOM 10 LY18-12RECW    84 ORA LY31-10RECW    84 ORA LY31-10RECB    84 POWER LY20-12RECW




84 POWER LY20-12RECB    85 RONUS LY32-7RECW    86 NIGHT LY34-GU10W    87 HONEY 5,5 LY25-5RECW    87 HONEY 8,2 LY25-10RECW    87 HONEY 8,5 LY23-7RECW

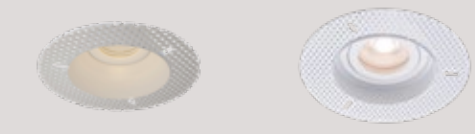

89 RIM LY15-GU10RECW    89 EYE TRIM LY14-GU10RECW

led profiles and lighting sources

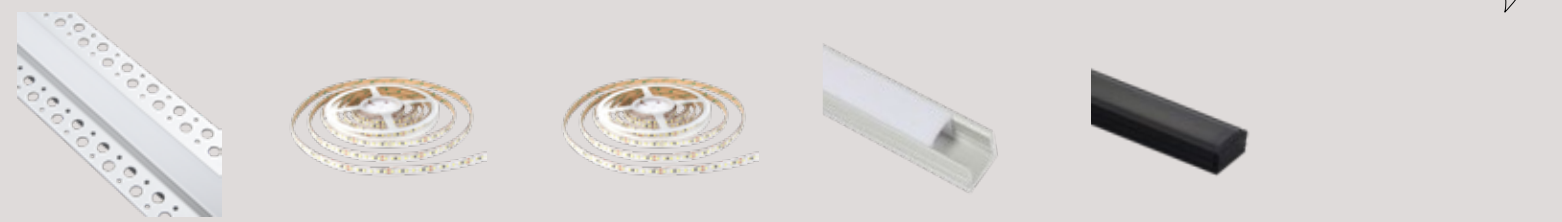

93 RECESSED LED PROFILES LY-LPR15    94 LED STRIP LY-SL4    94 LED STRIP LY-SL3    95 SURFACE LED PROFILE LY-LPS17W    95 SURFACE LED PROFILE LY-LPS17B

flexible neon system



99 Double head ceiling    102 Horizontal hoisting    105 Pendant






The magnetic track provides limitless customization options for creating a soft and minimal yet powerful ambiance



LY-MTR2BR

### Recessed Magnetic profile

Sandy Black Aluminium  
IP20  
Recess Application  
Length: 2000mm  
Width: 31,8mm  
Recessed Width: 72mm  
Height: 55mm





Adjust the track lengths and geometry as needed, then simply add the lights to follow the contours






## Surface magnetic profile

Sandy Black Aluminium  
Sandy White Aluminium  
IP20  
Surface or Pendant Application  
Length: 2000mm  
Width: 26,4mm  
Height: 53mm

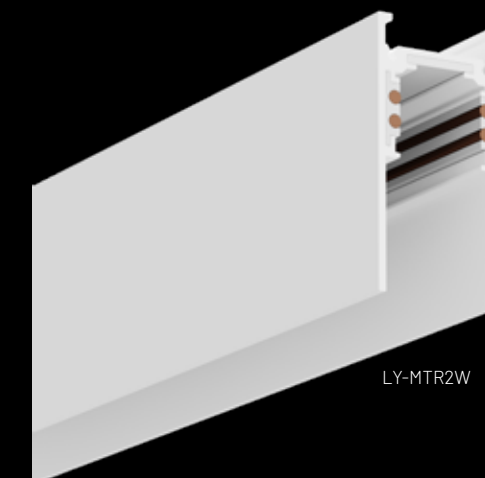

LY-MTR2W

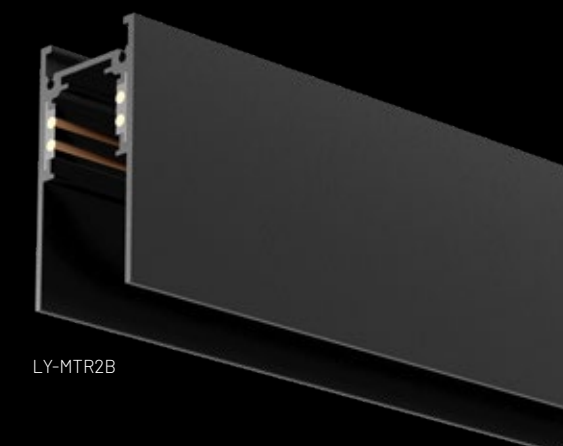


LY-MTR2B




## IDA

Outside: Sandy White Aluminium  
Inside: Sandy Black Aluminium  
Watt: 12W  
Volt: DC48V  
Lumen: 900Lm  
Beam Angle: 36°  
CRI: ≥90  
Kelvin: 3000K  
IP20  
Driver: ON-OFF  
Dimension: L220\*22\*45

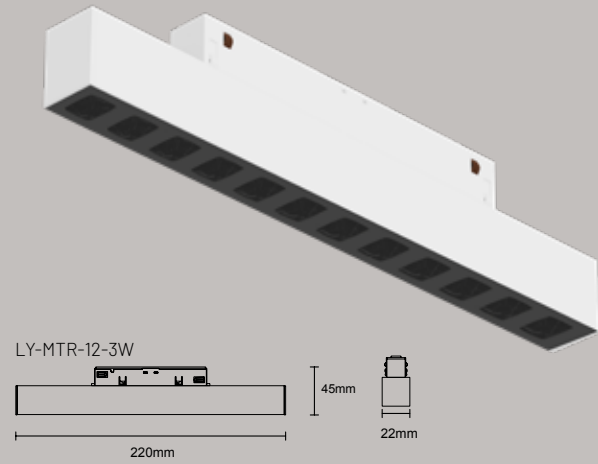

## INES

Outside: Sandy White Aluminium  
Inside: Sandy Black Aluminium  
Watt: 12W  
Volt: DC48V  
Lumen: 900Lm  
Beam Angle: 36°  
CRI: ≥80  
Kelvin: 3000K  
IP20  
Driver: ON-OFF  
Dimension: e52\*L125

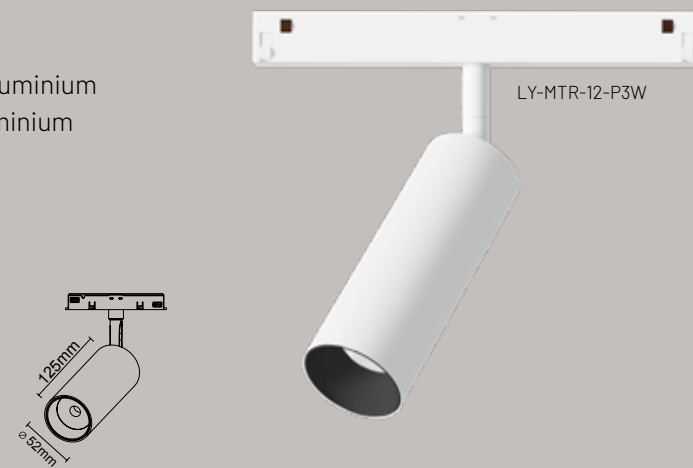

Choose from a variety of lights and mix and match to meet the needs and expectations of your clients, as the track can be surfaced, suspended or recessed

“  
The track will help  
you focus on the best  
features of your decor  
”







LY-MTR-10-P1B

## IVY


Sandy Black Aluminium  
 Watt: 10W  
 Volt: DC48V  
 Lumen: 780Lm  
 Beam Angle: 38°  
 CRI: ≥90  
 Kelvin: 3000K  
 IP20  
 Driver: ON-OFF  
 Dimension: Ø38\*L109

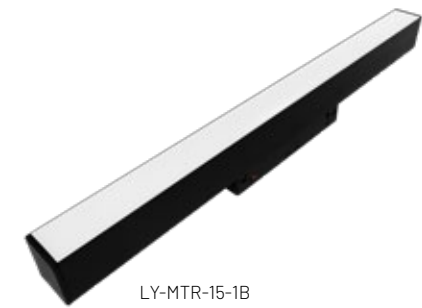

LY-MTR-15-1B

## THOR 01


Sandy Black Aluminium  
 Watt: 15W  
 Volt: DC48V  
 Lumen: 750Lm  
 Beam Angle: 110°  
 CRI: ≥90  
 Kelvin: 3000K  
 IP20  
 Driver: ON-OFF  
 Dimension: L600\*22\*25



LY-MTR-12-2B

## THOR 02


Sandy Black Aluminium  
 Watt: 12W  
 Volt: DC48V  
 Lumen: 750Lm  
 Beam Angle: 110°  
 CRI: ≥90  
 Kelvin: 3000K  
 IP20  
 Driver: ON-OFF  
 Dimension: L219\*22\*106

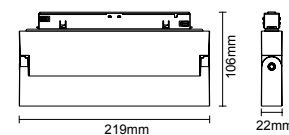





“  
 To add your own  
 touch to the design,  
 combine the magnetic  
 track with several  
 lighting options  
 ”

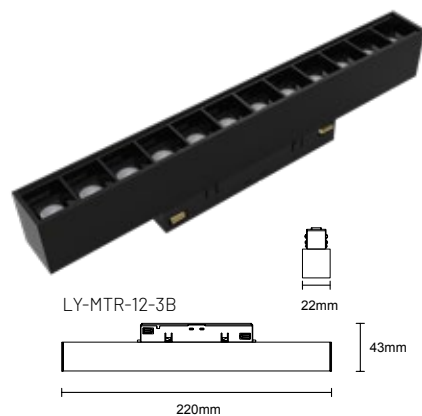

### LUV 01

Sandy Black Aluminium  
 Watt: 12W  
 Volt: DC48V  
 Lumen: 750Lm  
 Beam Angle: 38°  
 CRI: ≥90  
 Kelvin: 3000K  
 IP20  
 Driver: ON-OFF  
 Dimension: L220\*22\*43




### LUV 02

Sandy Black Aluminium  
 Watt: 12W  
 Volt: DC48V  
 Lumen: 750Lm  
 Beam Angle: 38°  
 CRI: ≥90  
 Kelvin: 3000K  
 IP20  
 Driver: ON-OFF  
 Dimension: L220\*22\*98



### ELM

Sandy Black Aluminium  
 Watt: 20W  
 Volt: DC48V  
 Lumen: 1400Lm  
 Beam Angle: 38°  
 CRI: ≥90  
 Kelvin: 3000K  
 IP20  
 Driver: ON-OFF  
 Dimension: Ø53\*L130






## MOON



Acrylic White  
Watt: 8 W  
Volt: DC48V  
Lumen: 600 Lm  
Beam Angle: 360°  
CRI: ≥80  
Kelvin: 3000K  
IP20  
Driver: ON-OFF  
Dimension: 130x130



Use straightforward geometry to give the design a cosmic look









“  
 Use the full range of  
 the connectors to  
 design your unique  
 lightning architecture  
 ”



INPUT MODULE

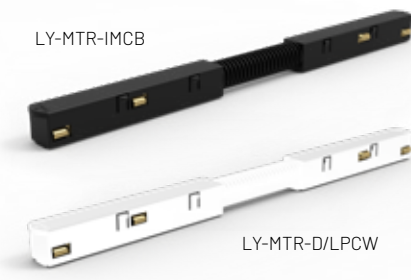

PROFILE ELECTRIC CONNECTOR

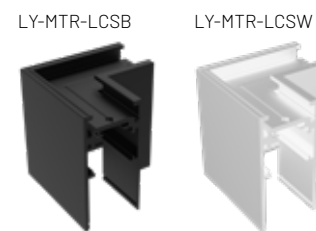

"L" CONNECTOR FOR SURFACE



"L" CONNECTOR FOR RECESSED



VERTICAL-HORIZONTAL CONNECTOR




IN TRACK DRIVER  
 100w • 250W




EXTERNAL DRIVER  
 100w • 200W • 350W




LINEAR MECHANIC RECESSED CONNECTOR

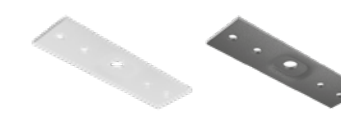

LINEAR MECHANIC SURFACE CONNECTOR

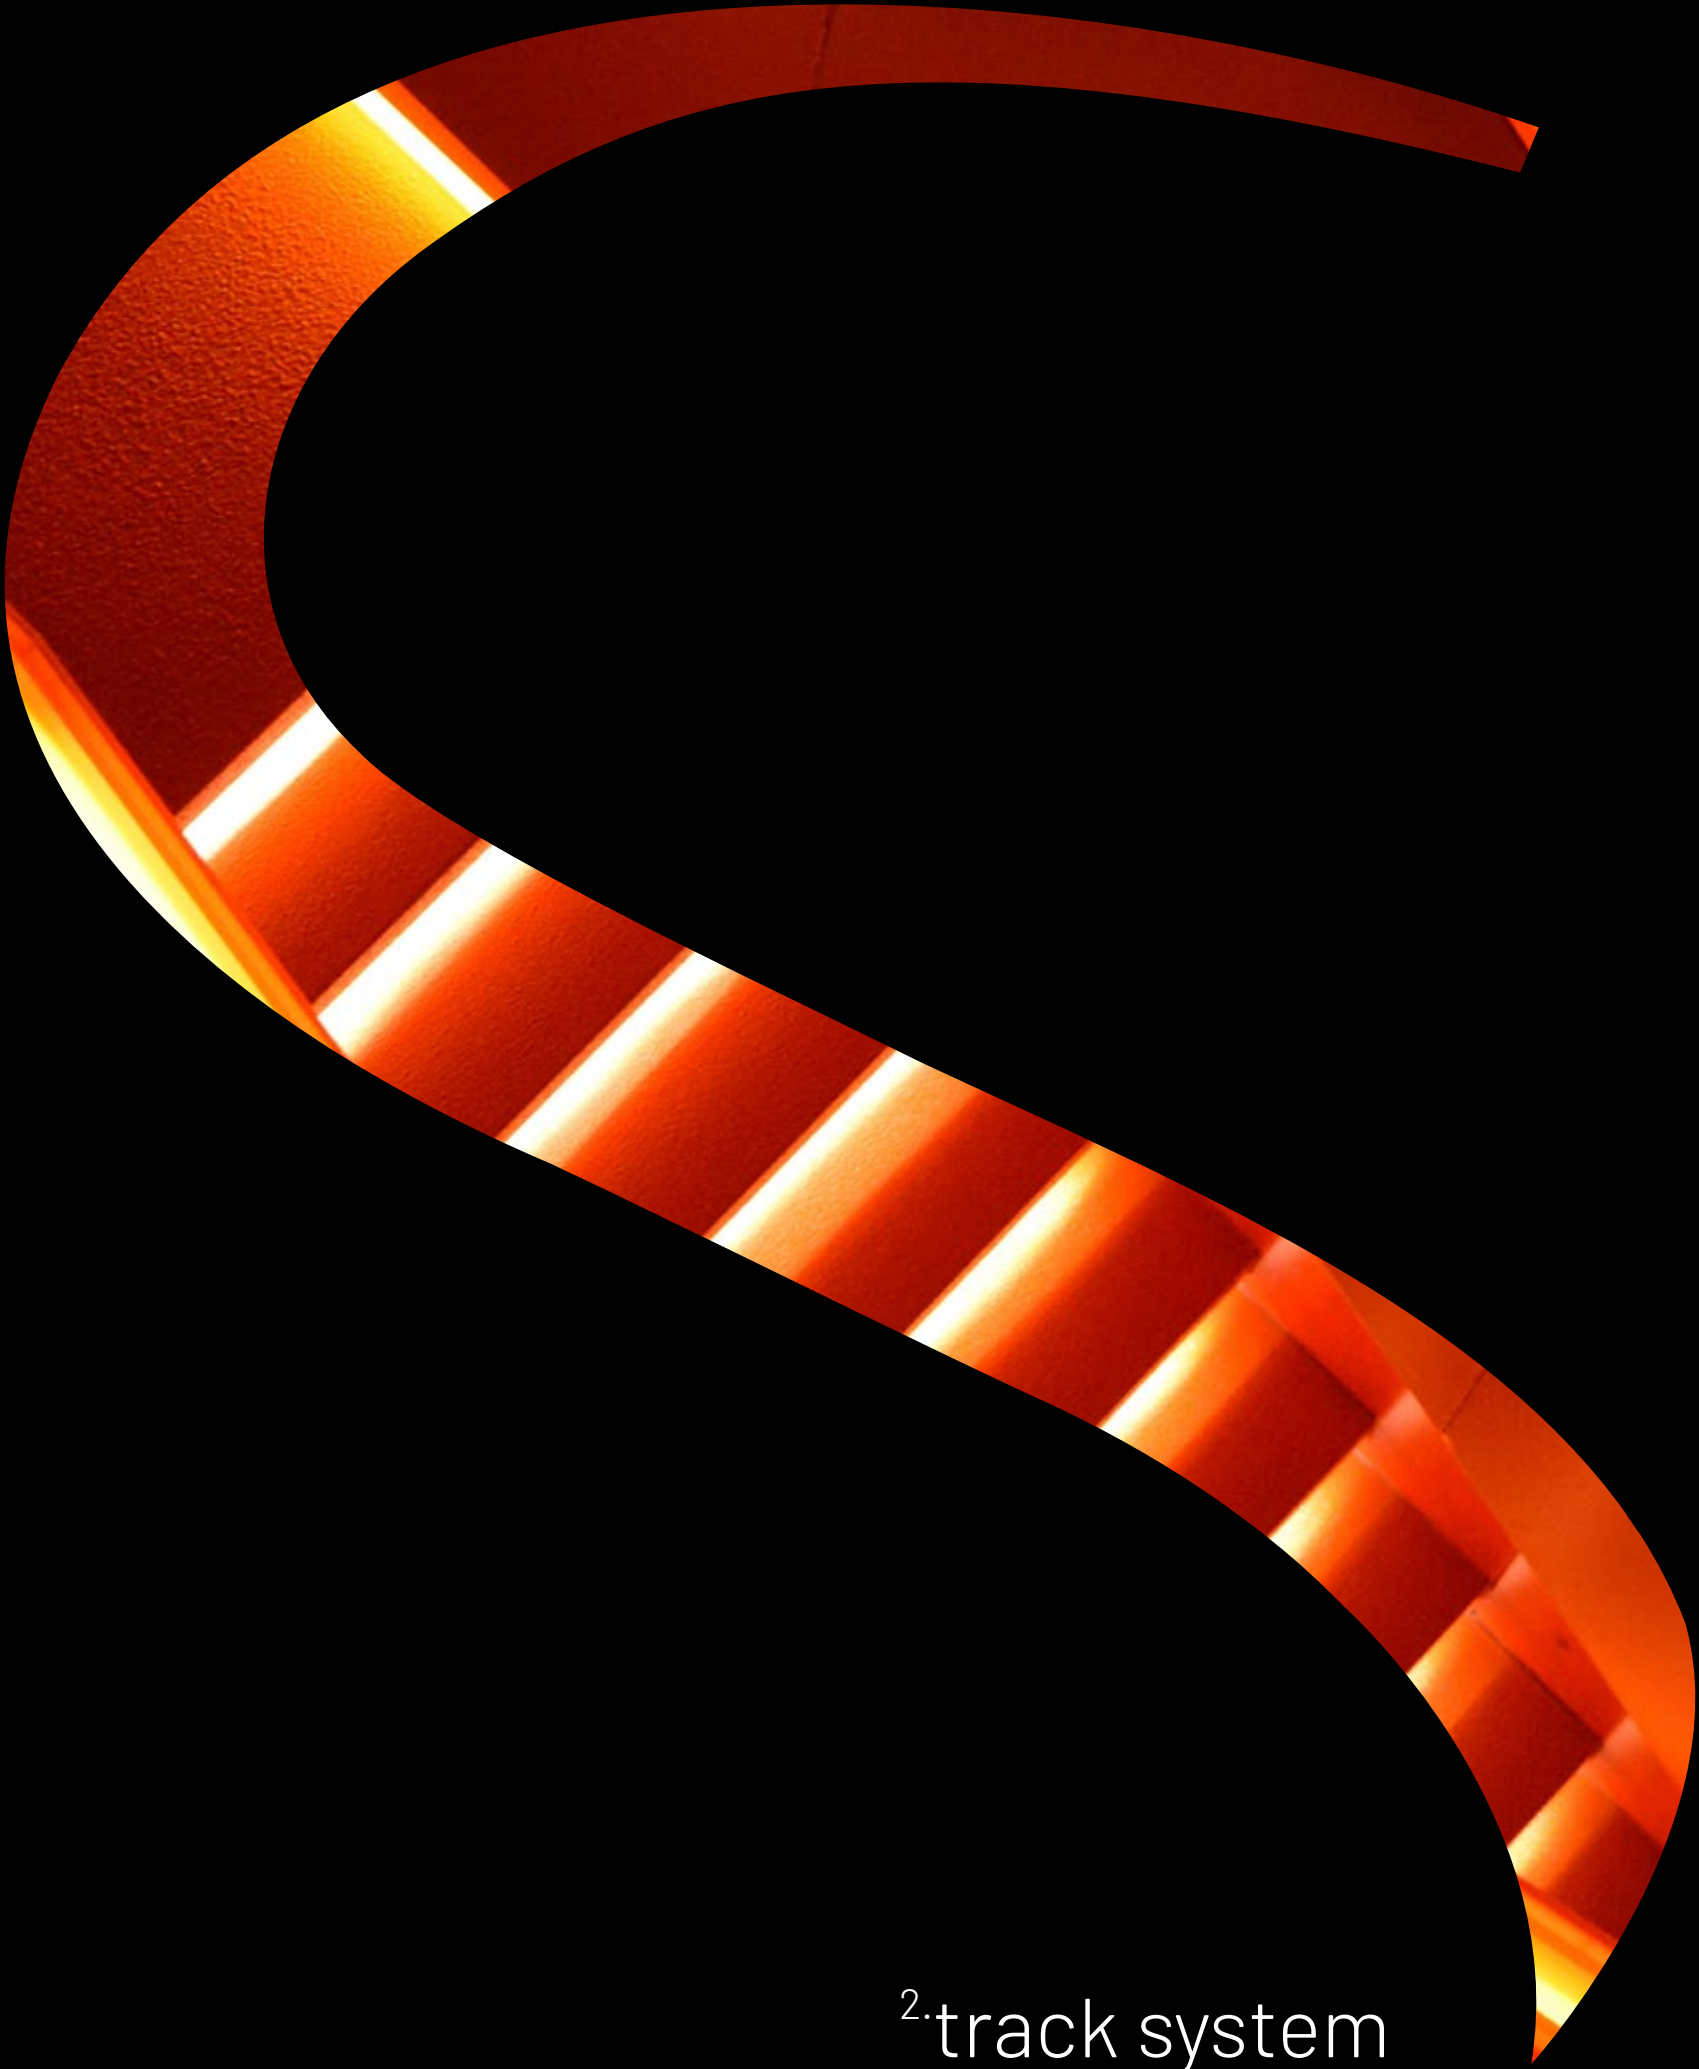



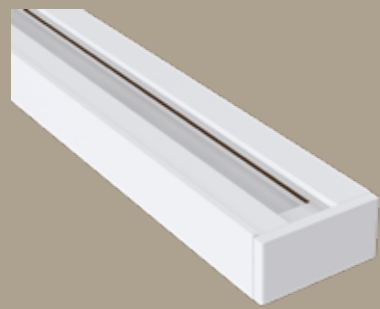


LY-TR2W



LY-TR2B

### Track rail

Sandy Black Aluminium  
Sandy White Aluminium  
2 Wires  
Dimensions: L2000xW340xH210mm




LY13-TRGU10W



LY13-TRGU10B

### KER



Sandy Black Aluminium  
Sandy White Aluminium  
Volt: 220V  
IP20  
GU10 max. 10W  
Dimensions: Ø6xH13cm



“  
The track combines  
functionality and  
adaptability with a  
sleek and luxurious  
design  
”






LY11-TRGU10W



LY11-TRGU10B

### ARM


Sandy Black Aluminium  
Sandy White Aluminium  
Volt: 220V  
IP20  
GU10 max. 10W  
Dimensions: Ø5,3xH20cm





## LOKUS

Sandy Black Aluminium  
Sandy White Aluminium  
Sandy Gold Aluminium+black  
Sandy Gold Aluminium +white  
Volt: 220V  
IP20  
GU10 max. 10W  
Dimensions: Ø5,2xH9,2cm








LY19-TR15B

### SIDE


Sandy Black Aluminium  
Volt: 220V  
IP20  
15W  
Lumen: 1275lm  
Kelvin: 3000K  
Dimensions: Ø6,5xH16,5cm



LY22-TR7B

### SPEC

Sandy Black Aluminium  
Volt: 220V  
IP20  
8W  
Lumen: 800lm  
Kelvin: 3000K  
Dimensions: Ø3,8xH10,8cm







“  
Use the track and  
the selected spots  
to highlight the most  
appealing aspects of  
your project  
”



LIVE END CONNECTOR



"L" CONNECTOR




"T" CONNECTOR




LINEAR CONNECTOR




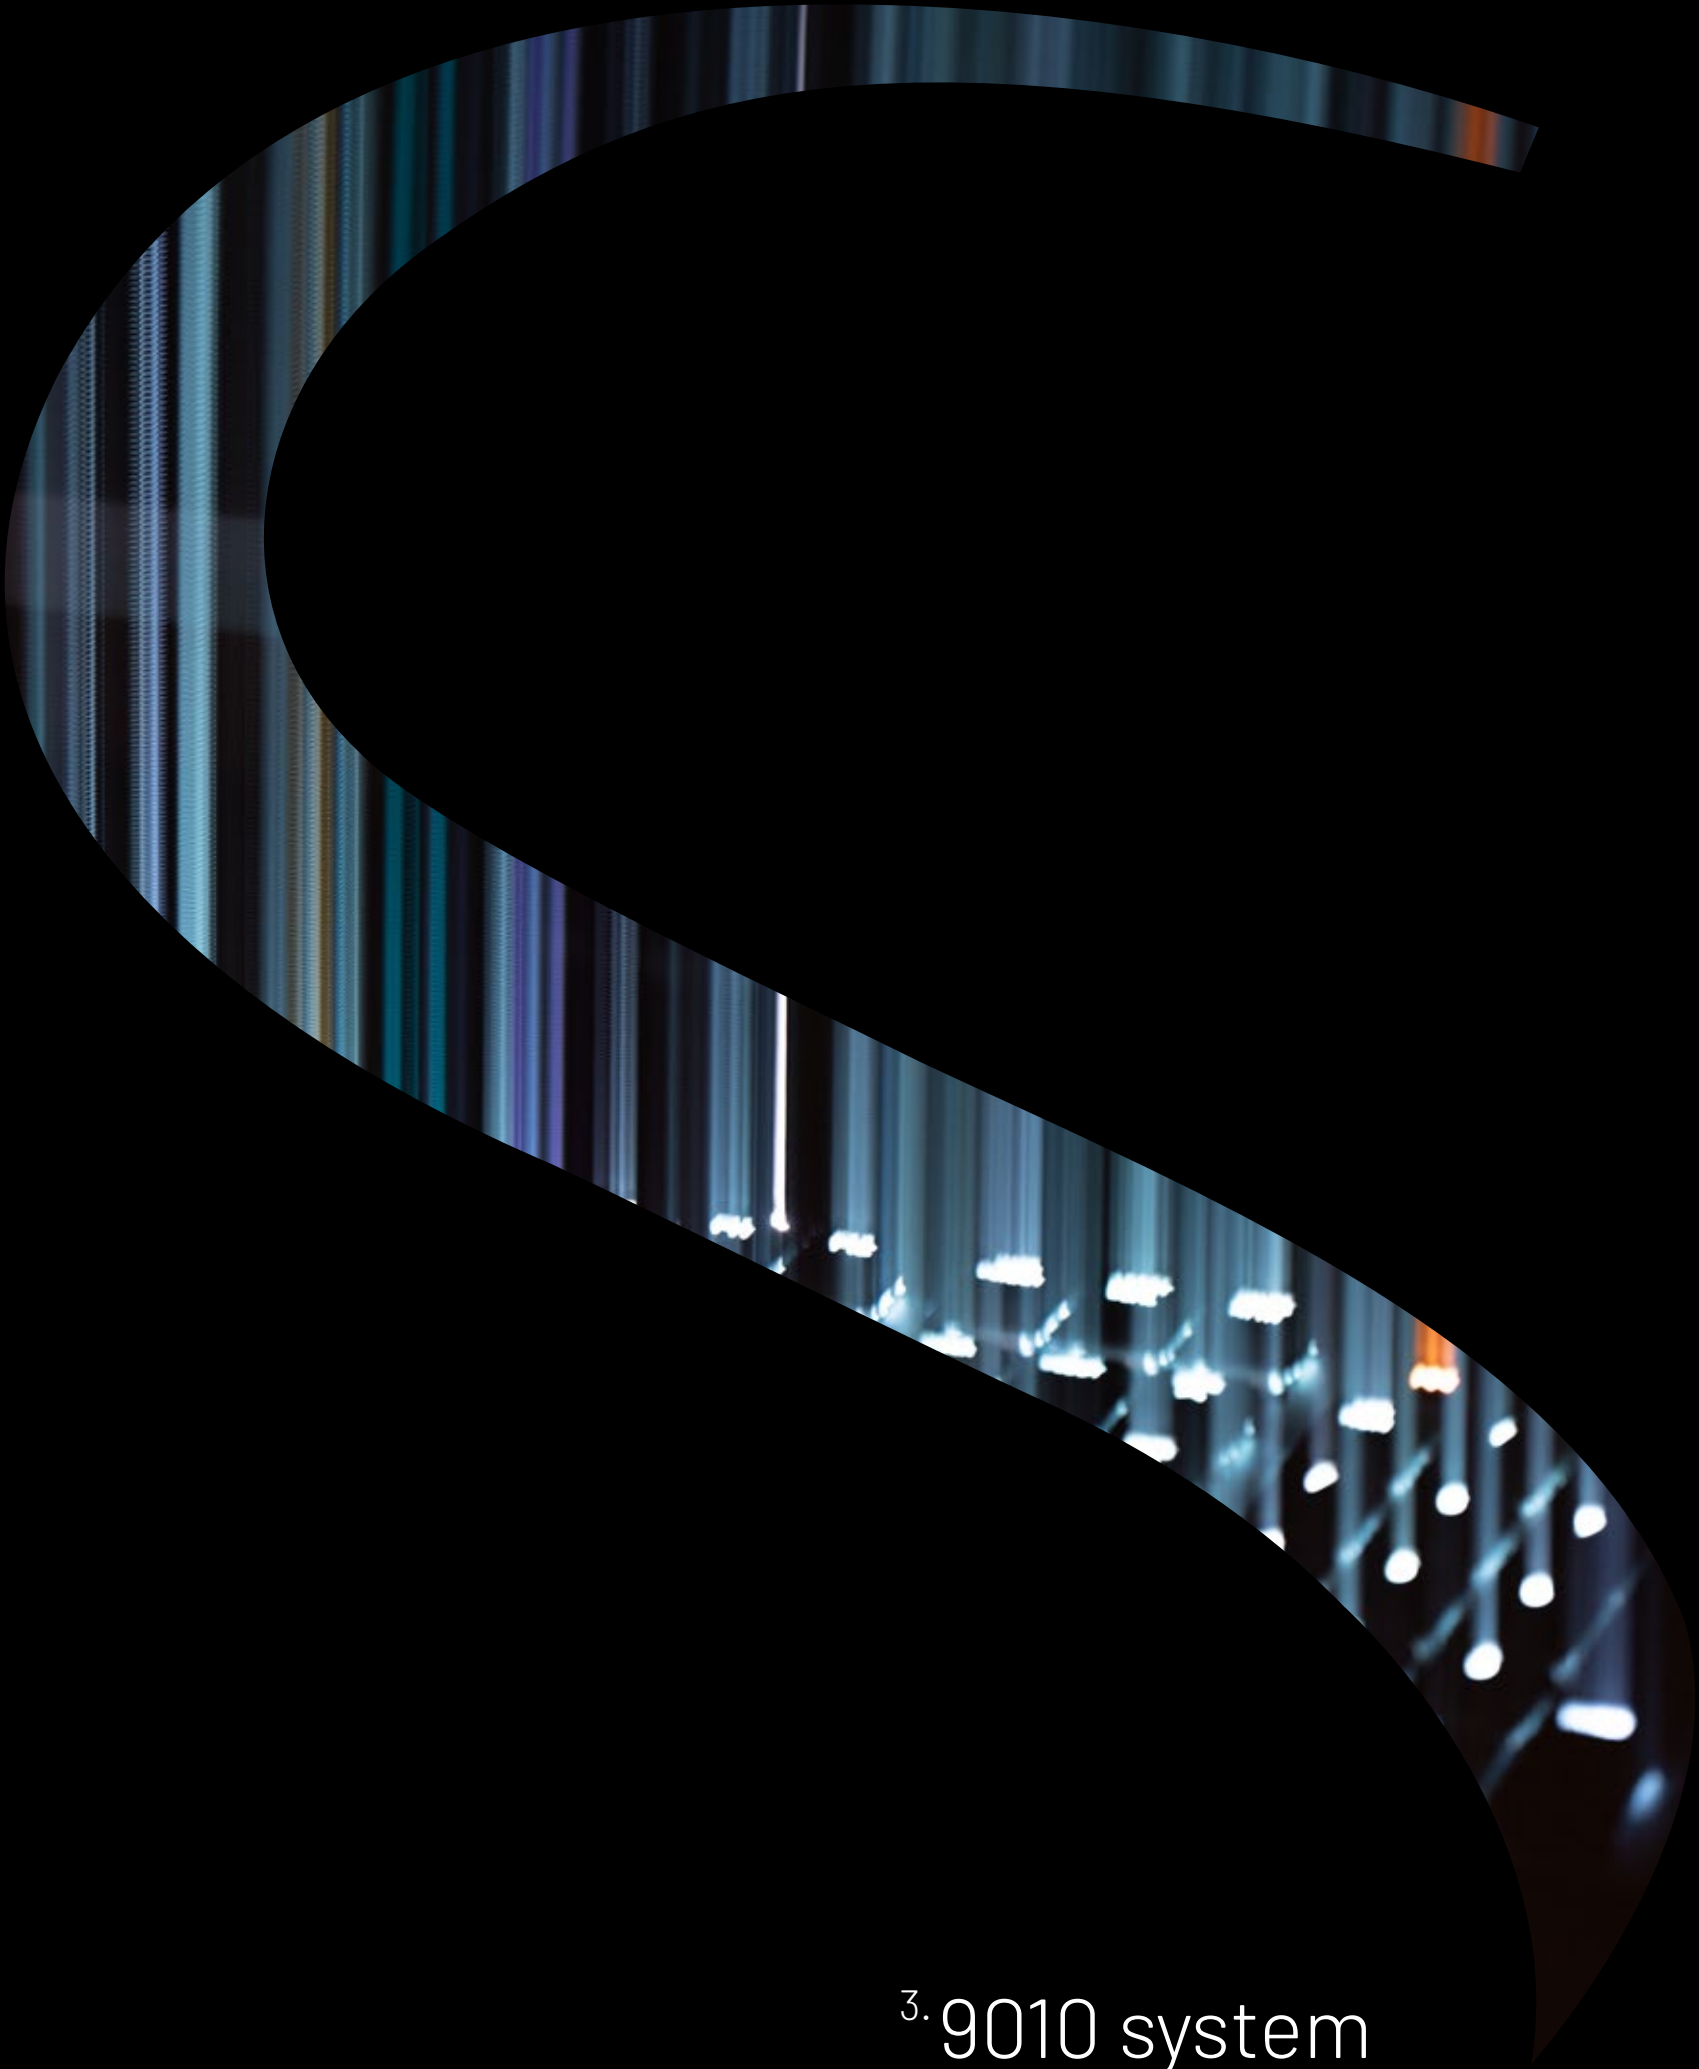



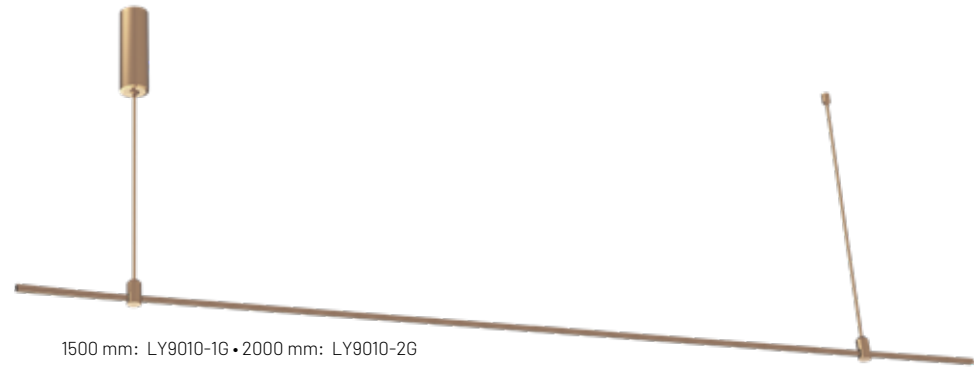


1500 mm: LY9010-1G • 2000 mm: LY9010-2G

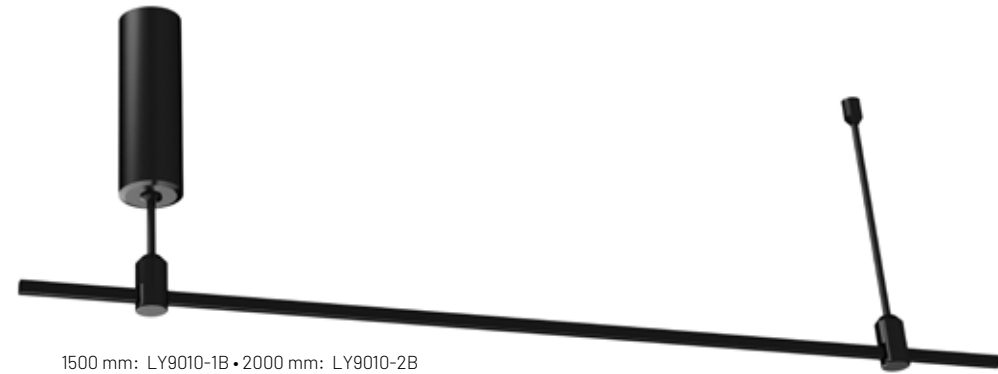

1500 mm: LY9010-1B • 2000 mm: LY9010-2B


### WAY 01

Sandy Black Aluminium  
 Brass Gold Aluminium  
 Meanwell 60W Driver included  
 Volt: DC24V  
 IP20  
 Driver: ON-OFF  
 Dimensions: L1500xH750mm  
 Compatible with all 9010 Lights.

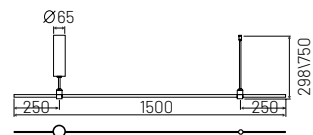

### WAY 02

Sandy Black Aluminium  
 Brass Gold Aluminium  
 Meanwell 60W Driver included  
 Volt: DC24V  
 IP20  
 Driver: ON-OFF  
 Dimensions: L2000xH750mm  
 Compatible with all 9010 Lights.

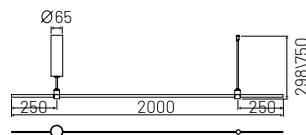



“ One of the most adaptable and stylish pipe-style fixtures, the 9010 System may be put together in a variety of ways that call for a minimalistic approach to lighting ”








LY9010-3G



LY9010-3B

### WAY 03

Sandy Black Aluminium  
 Brass Gold Aluminium  
 Meanwell 100W Driver included  
 Volt: DC24V  
 IP20  
 Driver: ON-OFF  
 Dimensions: L3000xH350mm  
 Compatible with all 9010 Lights.

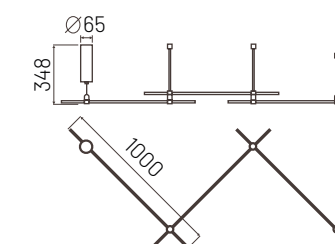






LY9010-4G





LY9010-4B

### WAY 04

Sandy Black Aluminium  
 Brass Gold Aluminium  
 Meanwell 150W Driver included  
 Volt: DC24V  
 IP20  
 Driver: ON-OFF  
 Dimension: L4000xH350mm  
 Compatible with all 9010 Lights.


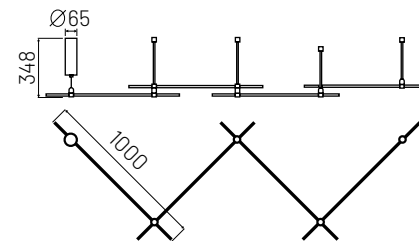




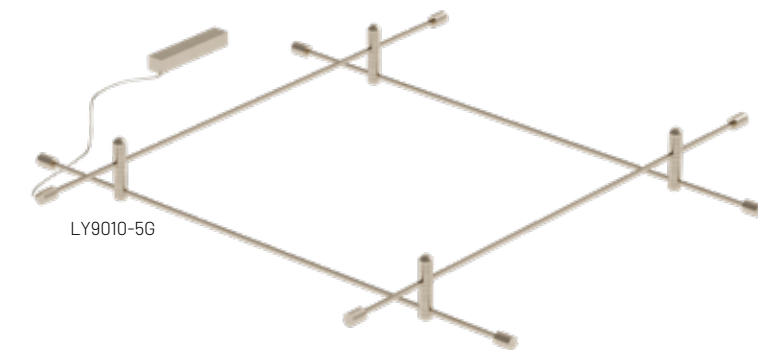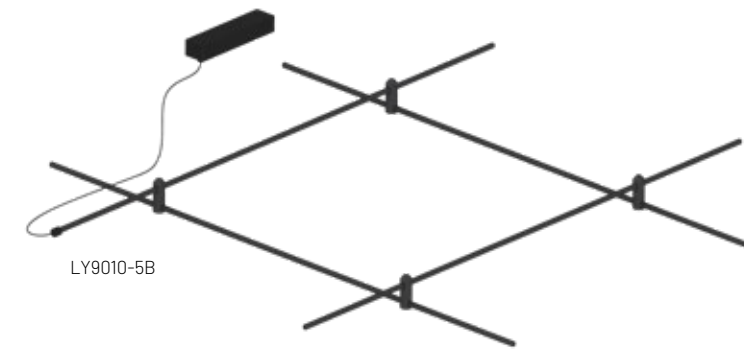


## SQUARE

Sandy Black Aluminium  
 Brass Gold Aluminium  
 Meanwell 100W Driver included  
 Volt: DC24V  
 IP20  
 Driver: ON-OFF  
 Dimension: 1500x1500mm  
 Choose your pipe for height 100, 300, 700  
 Compatible with all 9010 Lights.

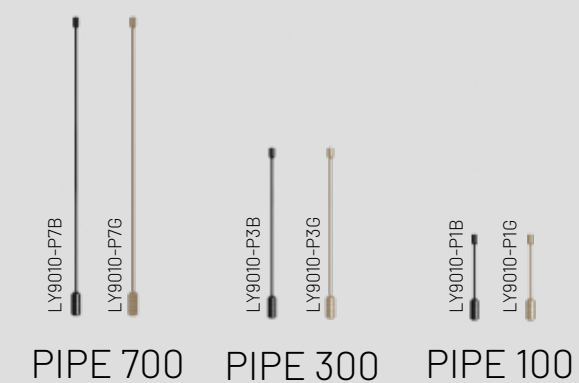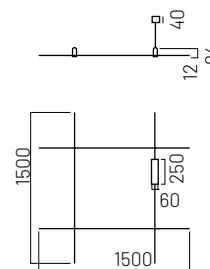


Using various pipe lengths, adjust the resulting product's geometry

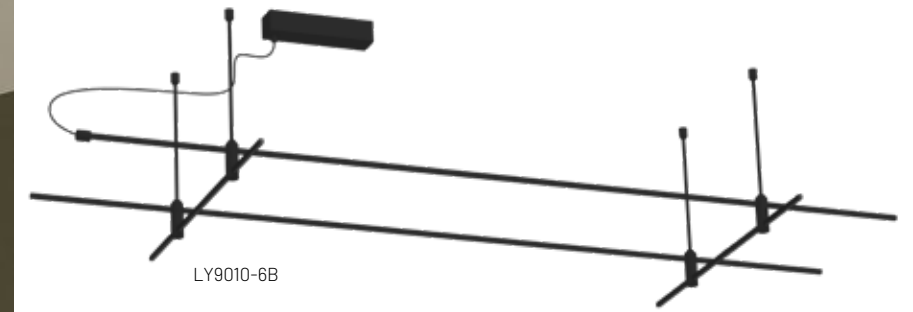

## RECTANGLE

Sandy Black Aluminium  
 Meanwell 100W Driver included  
 Volt: DC24V  
 IP20  
 Driver: ON-OFF  
 Dimension: L2000xW800mm  
 Choose your pipe for height 100, 300, 700mm  
 Compatible with all 9010 Lights.

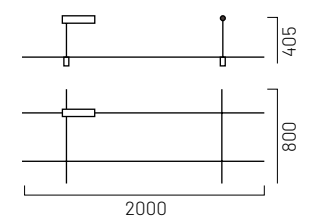

PIPE 700



PIPE 300



PIPE 100

**Straight lines and  
 perfect alignment of  
 your choice's various  
 pipe sizes**



“  
It is compatible with a  
variety of lights and is  
highly adjustable

”










## MALV

Sandy Black Aluminium  
 Brass Gold Aluminium  
 Volt: DC24V  
 IP20  
 Watt: 5W  
 Lumen: 300lm  
 Kelvin: 3000K  
 Driver: ON-OFF  
 Dimension: Ø60xH100mm

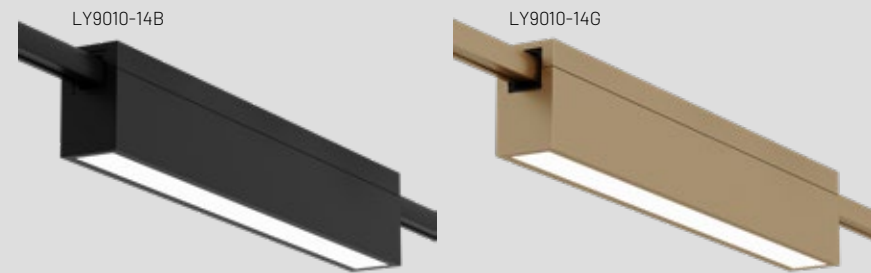

## DREAM

Sandy Black Aluminium  
 Brass Gold Aluminium  
 Volt: DC24V  
 IP20  
 Watt: 10W  
 Lumen: 700lm  
 Kelvin: 3000K  
 Driver: ON-OFF  
 Dimension: L250xW26xH44mm








LY9010-11B

LINE

Sandy Black Aluminium  
 Volt: DC24V  
 IP20  
 Watt: 5W  
 Lumen: 300lm  
 Kelvin: 3000K  
 Driver: ON-OFF  
 Dimension: Ø30xH160mm




LY9010-13G



LY9010-13B

LUCE

Sandy Black Aluminium  
 Brass Gold Aluminium  
 Volt: DC24V  
 IP20  
 Watt: 5W  
 Lumen: 600lm  
 Kelvin: 3000K  
 Driver: ON-OFF  
 Dimension: Ø32xH130mm

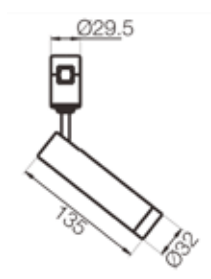





LY9010-12G



LY9010-12B

### ERA

Sandy Black Aluminu  
 Brass Gold Aluminu  
 Volt: DC24V  
 IP20  
 Watt: 5W  
 Lumen: 600lm  
 Kelvin: 3000K  
 Driver: ON-OFF  
 Dimension: Ø49xH100mm







“  
Lightweight, elegant,  
and sophisticated  
geometry to highlight  
the design’s features  
”




LY9010-15G



LY9010-15B

### GLOBE

Sandy Black Aluminium  
Brass Gold Aluminium  
Volt: DC24V  
IP20  
Watt: 5W  
Lumen: 500lm  
Kelvin: 3000K  
Driver: ON-OFF  
Dimension: Ø100xH130mm




LY9010-16G





LY9010-16B

### ALMA

Sandy Black Aluminium  
Brass Gold Aluminium  
Volt: DC24V  
IP20  
Watt: 8W  
Lumen: 400lm  
Kelvin: 3000K  
Driver: ON-OFF  
Dimension: Ø50xH260mm



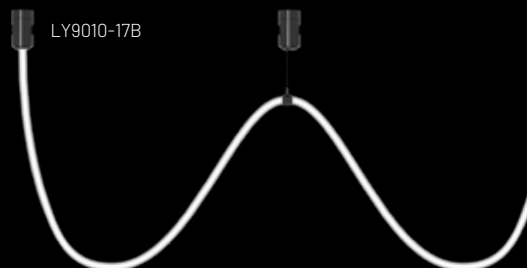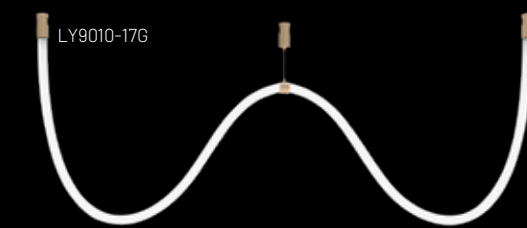

## TWIST

Sandy Black Aluminium  
Brass Gold Aluminium  
Volt: DC24V  
IP20  
Watt: 22W  
Lumen: 1125lm  
Kelvin: 3000K  
Driver: ON-OFF  
Dimension: max. length 1500mm





### SPARK

Sandy Black Aluminium  
 Brass Gold Aluminium  
 Volt: DC24V  
 IP20  
 Watt: 5W  
 Lumen: 300lm  
 Kelvin: 3000K  
 Driver: ON-OFF  
 Dimension: Ø120xH720mm



### FALL

Sandy Black Aluminium  
 Brass Gold Aluminium  
 Volt: DC24V  
 IP20  
 Watt: 5W  
 Lumen: 300lm  
 Kelvin: 3000K  
 Driver: ON-OFF  
 Dimension: Ø30xH660mm








# 4.1 surface downlights

## ARM

Sandy Black Aluminium  
Sandy White Aluminium  
Volt: 220V  
IP20  
GU10 max. 10W  
Dimensions: Ø5,3xH20cm

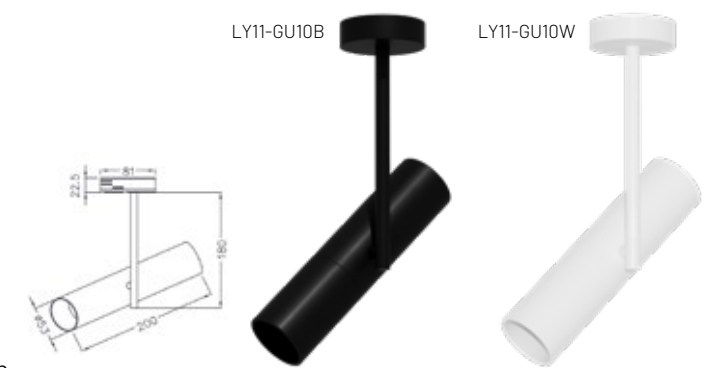






LY30-GU10W

## TUBE

Sandy White Aluminium  
Volt: 220V  
IP20  
GU10 max. 10W  
Dimensions: Ø5,5xH15cm



“  
To complement any  
modern home décor,  
we offer downlights  
in a variety of styles,  
from sleek modern  
designs to pointed  
spotlights  
”





LY10-12W




LY10-12B



### FOLD 8,5

Sandy Black Aluminium  
Sandy White Aluminium  
Volt: 24V  
IP20  
12W  
Lumen: 950lm  
Kelvin: 3000K  
Dimensions: Ø8,5xH7,8cm



LY10-18B




LY10-18W



### FOLD 12

Sandy Black Aluminium  
Sandy White Aluminium  
Volt: 24V  
IP20  
18W  
Lumen: 1250lm  
Kelvin: 3000K  
Dimensions: Ø12xH8,2cm







“  
 Select either  
 recessed or visible  
 spots but be sure the  
 lightning effect will  
 maximize the design  
 space  
 ”

LY12-GU10B



LY12-GU10W



RIN

Sandy Black Aluminium  
 Sandy White Aluminium  
 Volt: 220V  
 IP20  
 GU10 max. 10W  
 Dimensions: Ø8,5xH11,5cm



LY28-GU10W




LY28-GU10B



PLUMP

Sandy Black Aluminium  
 Sandy White Aluminium  
 Volt: 220V  
 IP20  
 GU10 max. 10W  
 Dimensions: Ø7,5xH9cm








**AMBRA**

Sandy White Aluminium  
 Volt: 24V  
 IP20  
 12W  
 Lumens: 900lm  
 Kelvin: 3000K  
 Cut-out: 6,5-9,5cm  
 Dimensions: Ø10xH6cm



LY33-12RECW



“ This hybrid spot offers a visible, yet elegant lighting solution, suitable for most indoor applications ”

LY26-GU10G

LY26-GU10W

LY26-GU10B



**LOKUS**

Sandy Black Aluminium  
 Sandy White Aluminium  
 Sandy Gold Aluminium  
 Volt: 220V  
 IP20  
 GU10 max. 10W  
 Dimensions: Ø5,2xH10cm






# 4.2 recessed downlights




LY26-GU10RECW

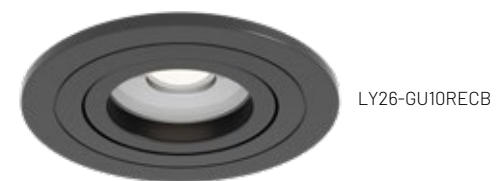

LY26-GU10RECB

## EYE

Sandy Black Aluminium  
Sandy White Aluminium  
Volt: 220V  
IP20  
GU10 max. 10W  
Cut-out: 8cm  
Dimensions: Ø9,2xH2,5cm



LY16-10RECW

## DEEP

Sandy White Aluminium  
Volt: 24V  
IP20  
10W  
Lumen: 700lm  
Kelvin: 3000K  
Cut-out: 9,5cm  
Dimensions: Ø10,3xH5cm








### MINI

White frame with black interior  
 Volt: 24V  
 IP44  
 5W  
 Lumen: 350lm  
 Kelvin: 3000K  
 Cut-out: 5cm  
 Dimensions: Ø5,8xH6,6cm

LY17-5RECW



“  
 The recessed spots are quite discrete but powerful. You can choose the range whenever you feel the need to accentuate but not overpower the design  
 ”

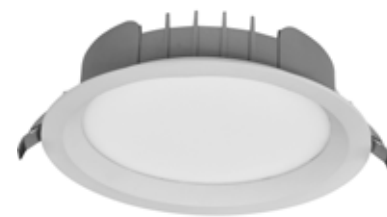

### ATOM 8,5

LY18-8RECW

Sandy White Aluminium  
 Volt: 24V  
 IP44  
 8W  
 Lumen: 560lm  
 Kelvin: 3000/4000/6500K  
 Cut-out: 7,5cm  
 Dimensions: Ø8,5xH3,6cm

### ATOM 10

LY18-12RECW

Sandy White Aluminium  
 Volt: 220V  
 IP44  
 12W  
 Lumen: 840lm  
 Kelvin: 3000/4000/6500K  
 Cut-out: 8,9cm  
 Dimensions: Ø10xH3,6cm







LY31-10RECW



LY31-10RECB



ORA

Sandy White Aluminium  
 Sandy Black Aluminium  
 Volt: 24V  
 IP44  
 10W  
 Lumen: 900lm  
 Kelvin: 3000K  
 Cut-out: 7,5cm  
 Dimensions: Ø9xH5cm

LY20-12RECW



LY20-12RECB



POWER

Sandy White Aluminium  
 Sandy Black Aluminium  
 Volt: 24V  
 IP44  
 12W  
 Lumen: 960lm  
 Kelvin: 3000K  
 Cut-out: 7,5cm  
 Dimensions: Ø8,5xH8,3cm



LY32-7RECW



RONUS

Sandy White Aluminium  
 Volt: 24V  
 IP44  
 7W  
 Lumen: 630lm  
 Kelvin: 3000K  
 Cut-out: 5,5cm  
 Dimensions: Ø6,2xH6,5cm






LY34-GU10B



### NIGHT

Sandy Black Aluminium  
 Volt: 24V  
 IP65  
 GU10 max. 10W  
 Cut-out: 7,5cm  
 Dimensions: Ø8,5xH8,5cm



### HONEY 5,5

LY25-5RECW

Sandy White Aluminium  
 Volt: 24V  
 IP20  
 5W  
 Lumen: 450lm  
 Kelvin: 3000K  
 Cut-out: 4,5cm  
 Dimensions: Ø5,5xH3,8cm

### HONEY 8,2

LY25-10RECW

Sandy White Aluminium  
 Volt: 24V  
 IP20  
 Watt: 10W  
 Lumen: 900lm  
 Kelvin: 3000K  
 Cut-out: 7,5cm  
 Dimensions: Ø8,2xH4,0cm



### HONEY 8,5

LY23-7RECB

Sandy Black Aluminium, Glossy Reflector/Matt Reflector  
 Volt: 24V  
 IP20  
 7W  
 Lumen: 630lm  
 Kelvin: 3000K  
 Cut-out: 7,5cm  
 Dimensions: Ø8,5xH4,4cm





# 4.3 trimless downlights



“  
The trimless collection plays the invisible card well and adds a touch of industrial luxury to your interior design. It gives a bright lightning effect while keeping a minimal appearance  
”



LY15-GU10RECW



## RIM


Sandy White Aluminium  
Volt: 220V  
IP65  
GU10 max. 10W  
Cut-out: 8,5cm  
Dimensions: ø125 including trimless profile

LY14-GU10RECW



## EYE TRIM

Sandy White Aluminium  
Volt: 220V  
IP20  
GU10 max. 10W  
Cut-out: 8cm  
Dimensions: ø125 including trimless profile

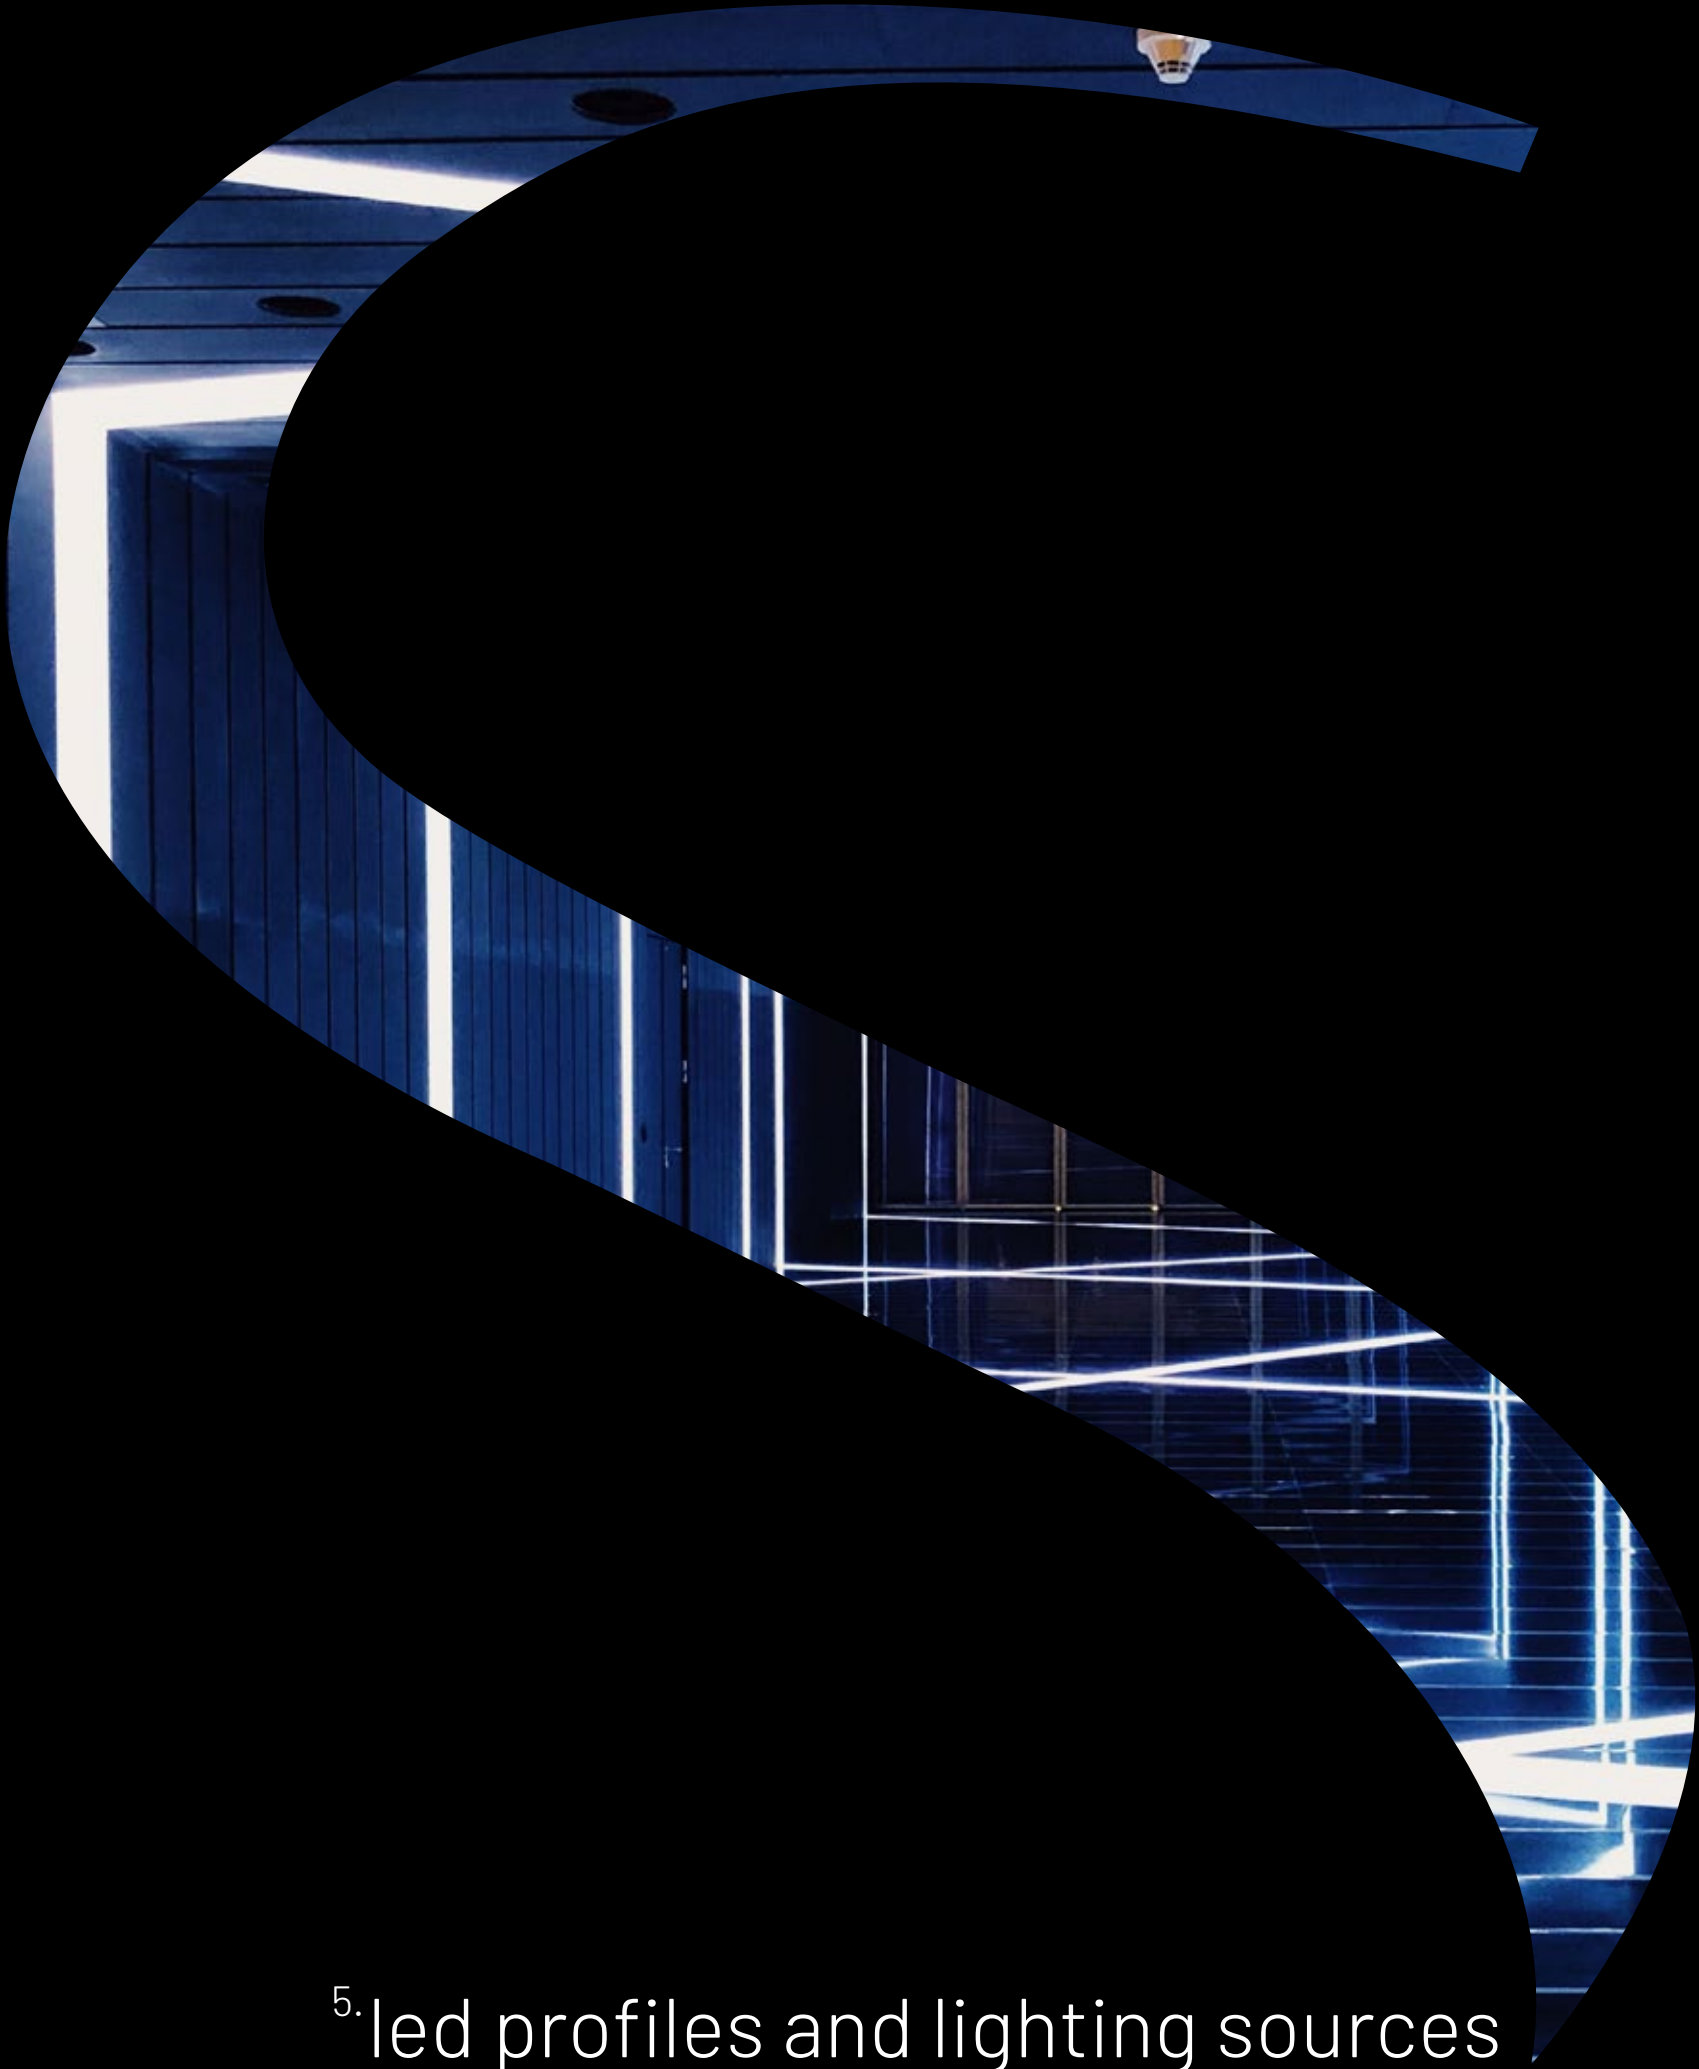






## RECESSED LED PROFILES

Color: silver

Code: LY-LPR15

Material: aluminiu

Dimensions: L: 2000mm, Width: 15mm,  
Height: 15mm, recessed height: 10,5mm



LY-LPR15



## ACCESORIES



L connector



linear  
connector



vertical-  
horizontal  
connector





## LED STRIP

Volt: 24V  
LED Qty/m: 120pcs  
Power/m: 14,4W  
Length: 5 meter roll  
Width: 10mm  
LY-SL4: 4000K - 1450L/M  
LY-SL3: 3000K - 1300L/M



“  
Accent lights are a versatile,  
conveniently oriented, and  
energy-saving option  
”

## SURFACE LED PROFILE

Black Anodized Aluminium  
White Anodized Aluminium  
Dimensions: L2000 X W17,4 X H8,2 mm




LY-LPS17W



LY-LPS17B



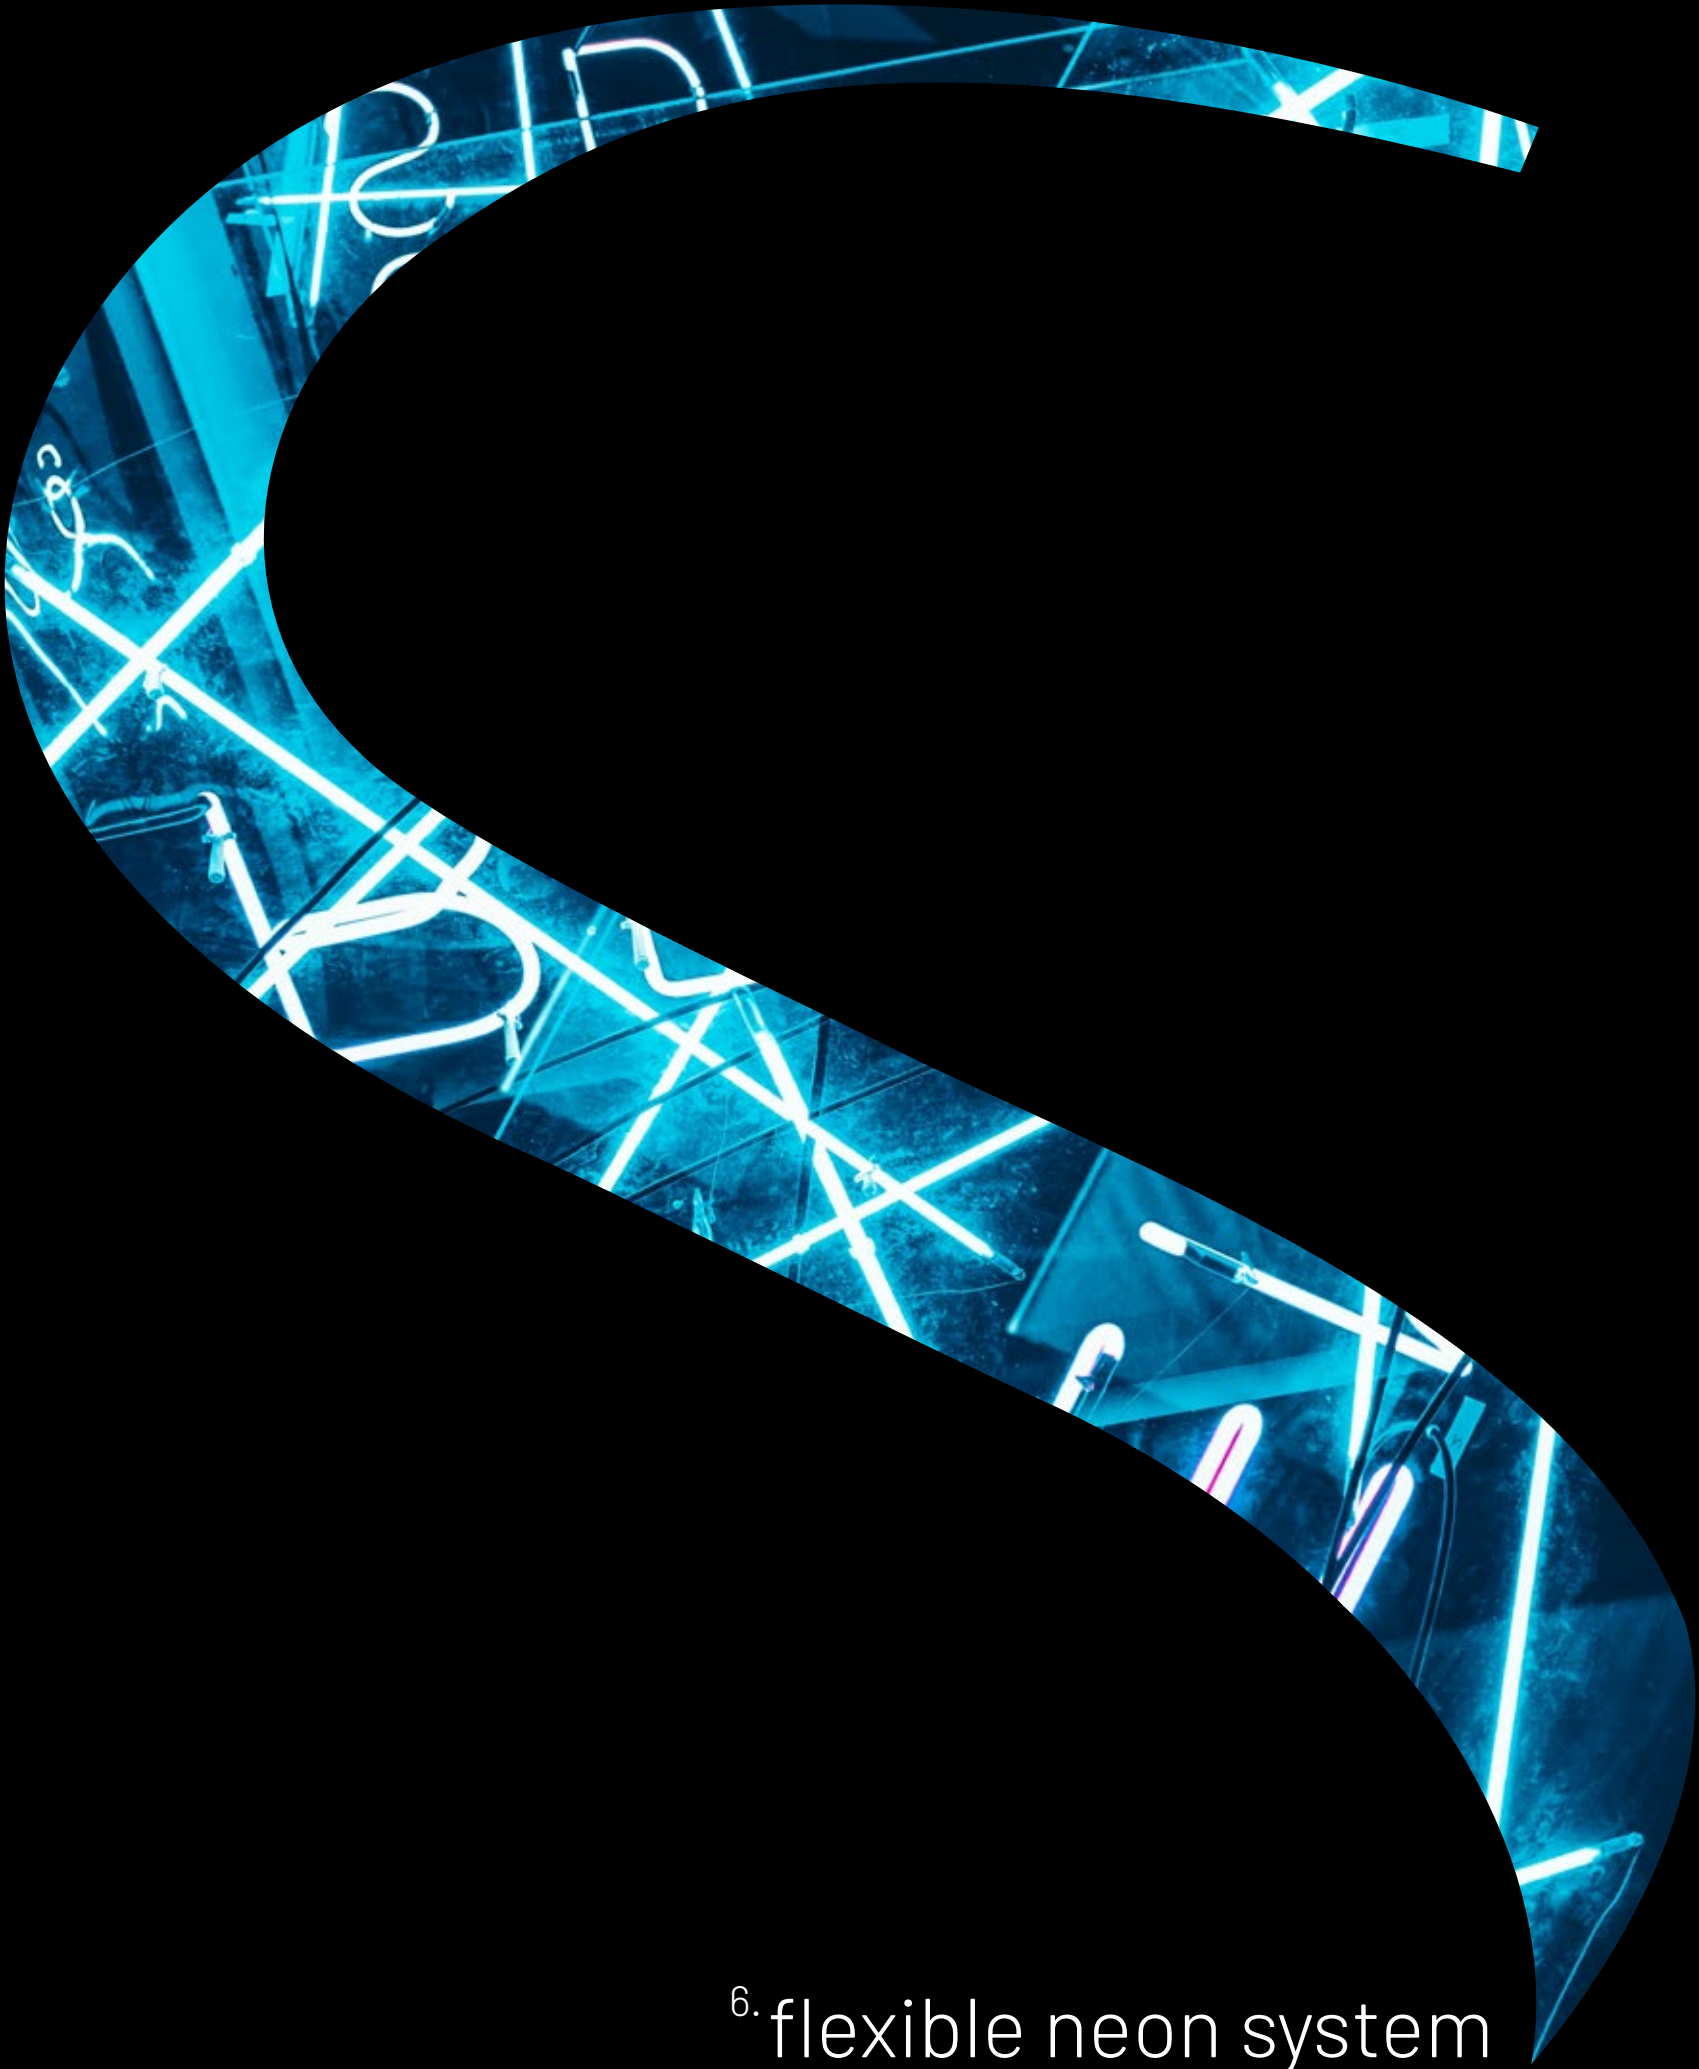





## DOUBLE HEAD CEILING

Power/m: 14,4W

Lumen/m: 1300lm for 3000K & 1450lm for 4000K

Volt: 24V

Kelvin: 3000K/4000K

Max. Length 5 meters/1 electricity wire circuit







## SUSPENSION

Power/m: 14,4W

Lumen/m: 1300lm for 3000K & 1450lm for 4000K

Volt: 24V

Kelvin: 3000K/4000K

Max. Length 5 meters/1 electricity wire circuit

Cable length: max. 1500mm







## HORIZONTAL HOISTING

Power: 21,6W  
Lumen: 1950lm for 3000K & 2175lm for 4000K  
Volt: 24V  
Kelvin: 3000K/4000K  
Dimensions: Ø 24x1500mm  
Cable length: max. 1500mm





“

One of the most adaptable lighting fixtures, taking any organic shape needed by your design. It has enough strength to serve as the main source of light but may also be utilized as an accent light. The LED tube can be suspended, mounted on the wall, or mounted as a pendulum. Due to its ability to be dimmed and connected to smart lighting systems, it can be highly customized

”



## PENDANT

Power: 14,4W  
Lumen: 1300lm for 3000K & 1450lm for 4000K  
Volt: 24V  
Kelvin: 3000K/4000K  
Dimensions: Ø 24x1000mm  
Cable length: max. 1500mm

## WALL

Power/m: 14,4W  
Lumen/m: 1300lm for 3000K & 1450lm for 4000K  
Volt: 24V  
Kelvin: 3000K/4000K  
Max. Length 5 meters/1 electricity wire circuit





Thank you for reading our catalogue. To ensure that you can deliver the best projects to your clients, we will gladly assist you in any way we can. We are happy to help you with your creative projects because interior design is always a great ride. You can get in touch with us over the phone or online with just one click. Share the catalog with a colleague; we will be happy to consider recommendations.

Interior design and 3D visualisation in this catalog were made with the suport of interior Arhitect Iuliana Marus @meshes.design which we highly recommend.

We are grateful to the outstanding Inoveo team for guiding us in uncovering the essence of our brand.

See you soon,  
Carmen & Alexandru

---

18 Central Street  
1st district, Bucharest  
+40 755 144 307  
hello@lyset.ro